

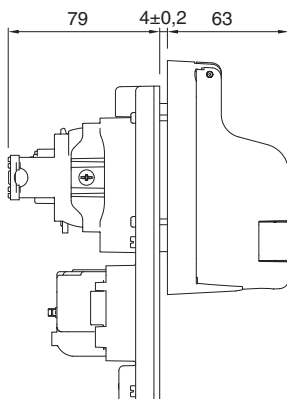


200.4007B

DRILLING TEMPLATE

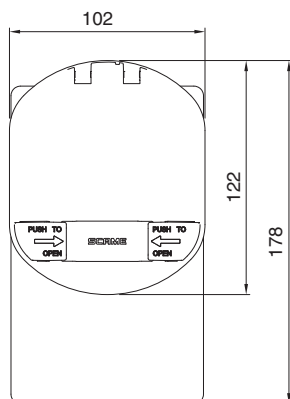

(dimension in mm)

InfoTECH




ITALY

WORLDWIDE

Numero Verde
800-018009Scame OnLine
www.scame.com
infotech@scame.com

200.4007B

DRILLING TEMPLATE

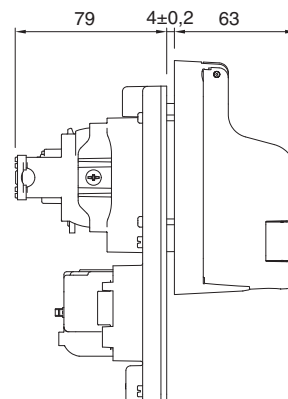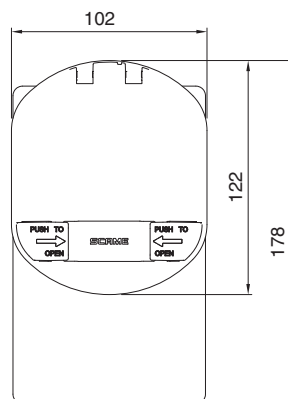

(dimension in mm)

InfoTECH




ITALY

WORLDWIDE

Numero Verde
800-018009Scame OnLine
www.scame.com
infotech@scame.com

200.4007B

DRILLING TEMPLATE

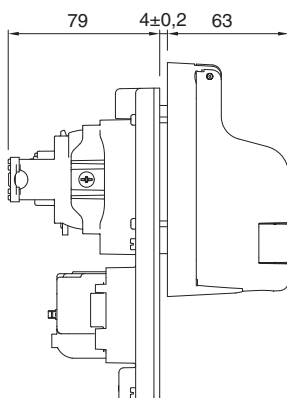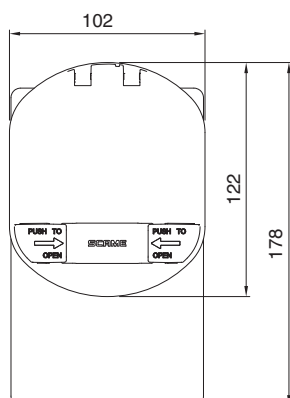

(dimension in mm)

InfoTECH




ITALY

WORLDWIDE

Numero Verde
800-018009Scame OnLine
www.scame.com
infotech@scame.com

200.4007B

DRILLING TEMPLATE

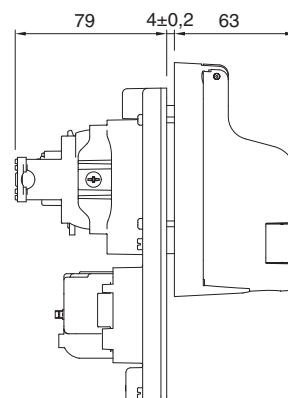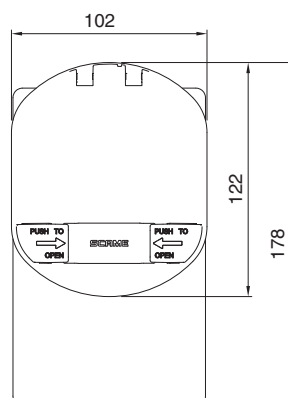

(dimension in mm)

InfoTECH

ITALY

WORLDWIDE

Numero Verde
800-018009Scame OnLine
www.scame.com
infotech@scame.com

200.4007B

Description	A (mm)	Cross section (mm²)	Torque Nm
L	10	1-4	0,8
N	10	1-4	0,8
⊕	10	1-4	0,8
1÷8	7	0,75-2,5	0,4

	1	3	Voltage
Lock on	+	-	12Vdc
Lock off	-	+	12Vdc

200.4007B

Description	A (mm)	Cross section (mm²)	Torque Nm
L	10	1-4	0,8
N	10	1-4	0,8
⊕	10	1-4	0,8
1÷8	7	0,75-2,5	0,4

	1	3	Voltage
Lock on	+	-	12Vdc
Lock off	-	+	12Vdc

200.4007B

Description	A (mm)	Cross section (mm²)	Torque Nm
L	10	1-4	0,8
N	10	1-4	0,8
⊕	10	1-4	0,8
1÷8	7	0,75-2,5	0,4

	1	3	Voltage
Lock on	+	-	12Vdc
Lock off	-	+	12Vdc

200.4007B

Description	A (mm)	Cross section (mm²)	Torque Nm
L	10	1-4	0,8
N	10	1-4	0,8
⊕	10	1-4	0,8
1÷8	7	0,75-2,5	0,4

	1	3	Voltage
Lock on	+	-	12Vdc
Lock off	-	+	12Vdc