

200.33234C2 / 200.33234C4

1,2 Nm

PP R
0,75mm²
L=100mm

(*) CRIMPED TERMINALS
Note
Insert all terminals even in cased of single-phase wiring

In	R ±2%
13A	1,5kΩ 0,5W
20A	680Ω 0,5W
32A	220Ω 0,5W

Description	A	C2	C4
L1	17mm	2,5	4
L2	17mm	2,5	4
L3	17mm	2,5	4
N	17mm	2,5	4
⊕	27mm	2,5	4
CP	14mm	0,75	0,75
PP	14mm	0,75	0,75

max 102 mm

A

200.33234C2 / 200.33234C4

1,2 Nm

PP R
0,75mm²
L=100mm

(*) CRIMPED TERMINALS
Note
Insert all terminals even in cased of single-phase wiring

In	R ±2%
13A	1,5kΩ 0,5W
20A	680Ω 0,5W
32A	220Ω 0,5W

Description	A	C2	C4
L1	17mm	2,5	4
L2	17mm	2,5	4
L3	17mm	2,5	4
N	17mm	2,5	4
⊕	27mm	2,5	4
CP	14mm	0,75	0,75
PP	14mm	0,75	0,75

max 102 mm

A

200.33234C2 / 200.33234C4

1,2 Nm

PP R
0,75mm²
L=100mm

(*) CRIMPED TERMINALS
Note
Insert all terminals even in cased of single-phase wiring

In	R ±2%
13A	1,5kΩ 0,5W
20A	680Ω 0,5W
32A	220Ω 0,5W

Description	A	C2	C4
L1	17mm	2,5	4
L2	17mm	2,5	4
L3	17mm	2,5	4
N	17mm	2,5	4
⊕	27mm	2,5	4
CP	14mm	0,75	0,75
PP	14mm	0,75	0,75

max 102 mm

A

200.33234C2 / 200.33234C4

1,2 Nm

PP R
0,75mm²
L=100mm

(*) CRIMPED TERMINALS
Note
Insert all terminals even in cased of single-phase wiring


In	R ±2%
13A	1,5kΩ 0,5W
20A	680Ω 0,5W
32A	220Ω 0,5W

Description	A	C2	C4
L1	17mm	2,5	4
L2	17mm	2,5	4
L3	17mm	2,5	4
N	17mm	2,5	4
⊕	27mm	2,5	4
CP	14mm	0,75	0,75
PP	14mm	0,75	0,75


max 102 mm

A

200.33234C2 / 200.33234C4

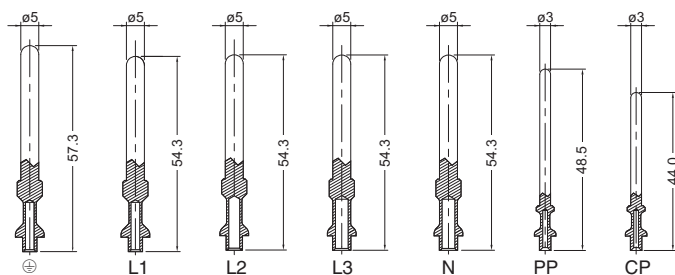

SUGGESTION FOR CRIMPING

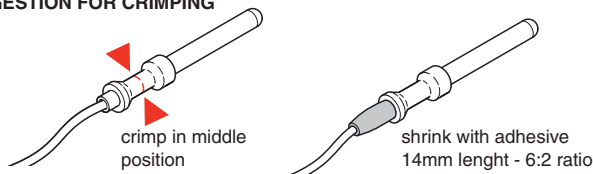

Note:

- For sizes from 0,75 to 2,5: Harting clamp 09 99 000 0110
- For size 4,0: Harting clamp 09 99 000 0303
- Only for flexible conductors

SUGGESTION FOR CABLE

Type: S05BQ-F or equivalent


Core insulation:
EPR-rubber, crosslinked, type EI6

Outer sheath:
PUR, type TPU flame-retardant


Operating temperature:
-40°C to +90°C



200.33234C2 / 200.33234C4

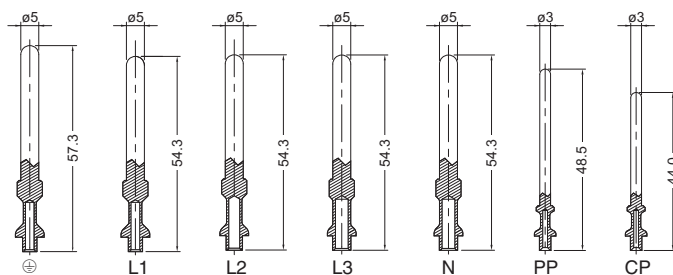

SUGGESTION FOR CRIMPING

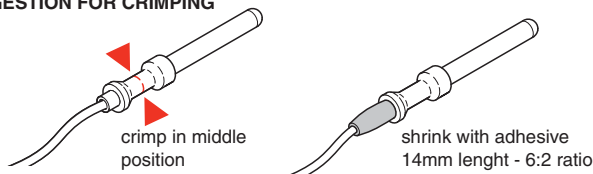

Note:

- For sizes from 0,75 to 2,5: Harting clamp 09 99 000 0110
- For size 4,0: Harting clamp 09 99 000 0303
- Only for flexible conductors

SUGGESTION FOR CABLE

Type: S05BQ-F or equivalent


Core insulation:
EPR-rubber, crosslinked, type EI6

Outer sheath:
PUR, type TPU flame-retardant


Operating temperature:
-40°C to +90°C



200.33234C2 / 200.33234C4

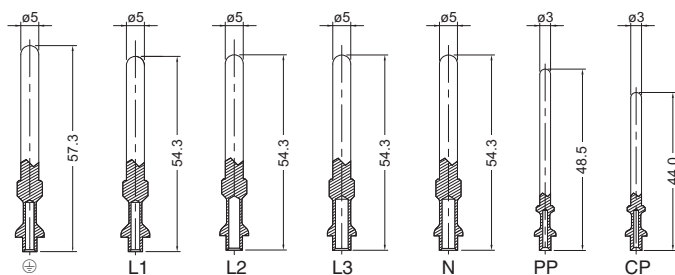

SUGGESTION FOR CRIMPING

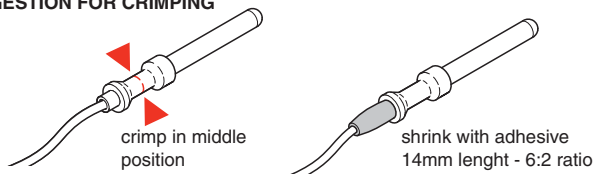

Note:

- For sizes from 0,75 to 2,5: Harting clamp 09 99 000 0110
- For size 4,0: Harting clamp 09 99 000 0303
- Only for flexible conductors

SUGGESTION FOR CABLE

Type: S05BQ-F or equivalent


Core insulation:
EPR-rubber, crosslinked, type EI6

Outer sheath:
PUR, type TPU flame-retardant


Operating temperature:
-40°C to +90°C



200.33234C2 / 200.33234C4

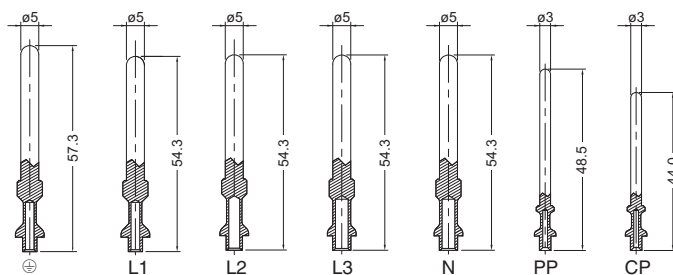

SUGGESTION FOR CRIMPING

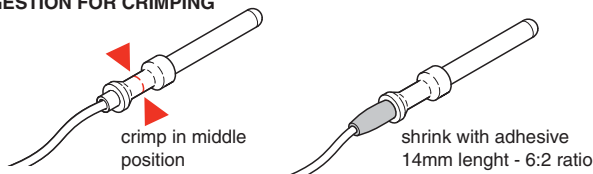

Note:

- For sizes from 0,75 to 2,5: Harting clamp 09 99 000 0110
- For size 4,0: Harting clamp 09 99 000 0303
- Only for flexible conductors

SUGGESTION FOR CABLE

Type: S05BQ-F or equivalent

Core insulation:
EPR-rubber, crosslinked, type EI6

Outer sheath:
PUR, type TPU flame-retardant

Operating temperature:
-40°C to +90°C

