


8	CARCASSE DE FICHE / PLUG CASING	31568-0000	1		
7	EARTH CABLE TERMINAL TO SCREW 50-70²	13286-5000		26	
	EARTH CABLE TERMINAL TO CRIMP OR SOLDER 95	13361-0110			
	EARTH CABLE TERMINAL TO CRIMP OR SOLDER 70²	11325-0110		29	
6	PHASE FEMALE CONTACT CAL.10	12548-5000	3		
5	EARTH PIN CAL.10	11249-0110	1		
4	PHASE CABLE TERMINAL TO SCREW 50-70²	13187-5000		26	
	PHASE CABLE TERMINAL TO CRIMP OR SOLDER 95²	13090-0110		30	
	PHASE CABLE TERMINAL TO CRIMP OR SOLDER 70²	11253-0110		29	
3	3+E FEMALE CONTACT CARRIER	20720-0000	1		
2	CABLE GLAND SEAL Ø54	11269-0000	1		
1	AUXILIARY PIN CAL.6	11270-5000	2		
Ind19	Description	Reference	Cont.	Strip. A	

ASSEMBLY INSTRUCTIONS

- 1- PREPARE THE CABLES AS SCHEME BELOW.
- 2- CRIMP OR SOLDER CABLE TERMINALS (4;7) ON PHASE CABLES AND EARTH CABLE [TOOL Nr 7 AND 8], FOR CABLE TERMINALS TO SCREW (4) [TOOL Nr 6].
- 3- UNSCREW HANDLE (8.1) [TOOL Nr 3] AND CABLE GLAND (8.3).
- 4- IN THE ORDER, SLIDE CABLE GLAND (8.3), WASHER (8.2), SEAL (2) AND HANDLE (8.1) OVER THE CABLE.
- 5- ENGAGE EARTH CONTACT (5) IN THE HOLE OF EARTH EAR IN THE MIDDLE OF PLUG CASING (8).
- 6- PLACE CABLE TERMINAL (7) OF EARTH CABLE AT THE BACKSIDE OF EARTH CONTACT (5), SCREW CONTACT, WHEN CABLE TERMINAL HEXAGON TOUCH EARTH EAR OF PLUG CASING (8), PUSH IT INSIDE OF EARTH EAR TO BLOCK IT, THEN TIGHTEN CONTACT (5) (TORQUE 4Nm) [TOOL Nr 1 AND 2].
- 7- REMOVE SCREWS OF CONTACTS (1) [TOOL Nr 5], INTRODUCE CONTACTS IN FRONT OF FEMALE CONTACT CARRIER (3). INTRODUCE PILOT CABLES IN BACKSIDE OF CONTACTS AND PUT SCREW IN CONTACTS THEN TIGHTEN [TOOL Nr 5].
- 8- INTRODUCE EACH CABLE TERMINAL (4) AT THE BACKSIDE OF FEMALE CONTACT CARRIER (3), HEXAGON OF CABLE TERMINAL MUST CORRESPOND WITH HEXAGON INSIDE OF THE FEMALE CONTACT CARRIER, THEN SCREW CONTACTS (6) IN THE FRONT OF FEMALE CONTACT CARRIER (TORQUE 4Nm) [TOOL Nr 1 AND 2].
- 9- INTRODUCE INSERT (3) IN BODY FRONT (8) AND FIX HANDLE (8.1) [TOOL Nr 3].
- 10- PLACE SEAL (2) AND WASHER (8.2) INTO HANDLE (8.1) THEN SCREW CABLE GLAND (8.3) TO BE WATERPROOF.
- 11- TIGHTEN SCREWS AND NUTS OF CABLE CLAMPS (8.4) ON CABLE TO BLOCK CABLE GLAND (8.3) [TOOL Nr 4].

LIST OF TOOLS *

- 1- TORQUE WRENCH FACOM REF. J.306A50
- 2- SOCKETS FACOM : 3/8" Nr14 REF: J.14LA
- 3- ANGLED SOCKET WRENCH OR OPEN END WRENCH 10mm
- 4- ANGLED SOCKET WRENCH OR OPEN END WRENCH 13mm
- 5- FLAT SCREWDRIVER Nr3
- 6- ALLEN KEY Nr4
- 7- CRIMPING TOOL KLAUKE HK 120 U
- 8- KLAUKE CRIMPING JAW: 70° REF: HNFF 13/70
95° REF: HNFF 13/95
- 9- CRIMPING TOOL CEMBRE H Nr1

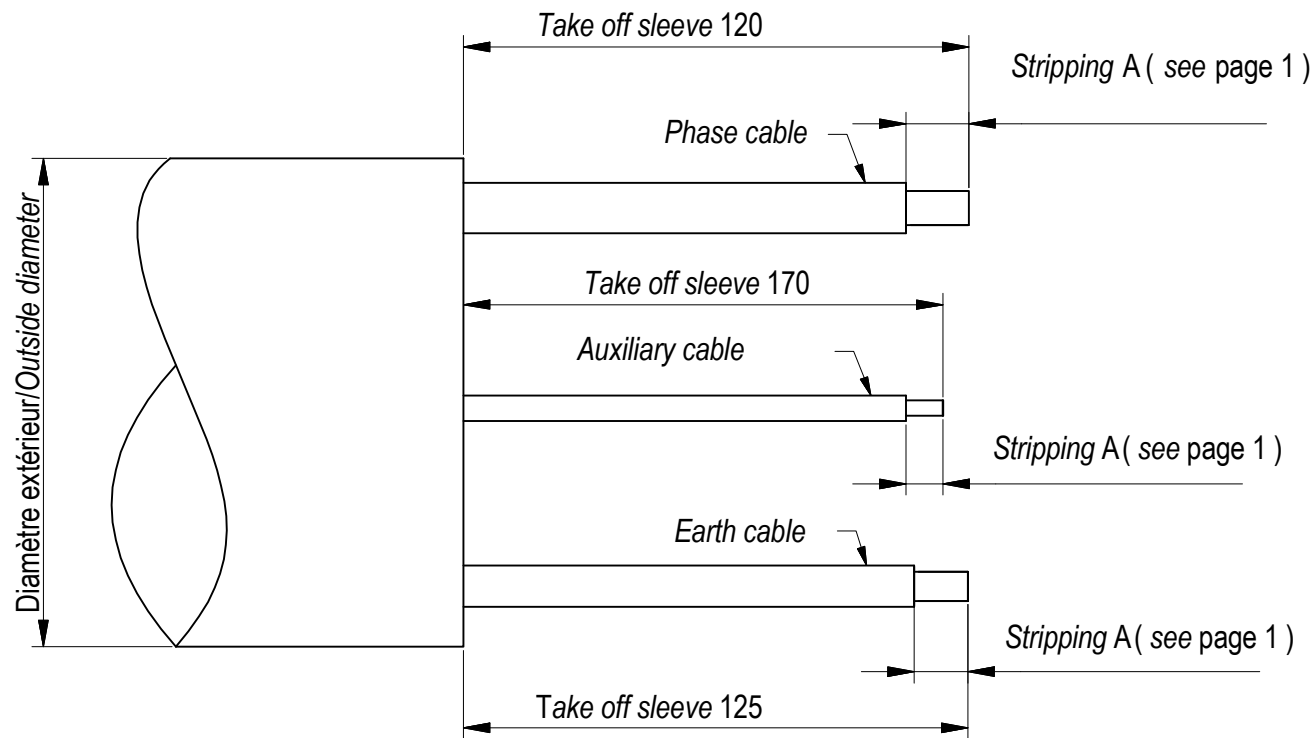

* TOOL REFERENCES ARE ONLY RECOMMENDED AND GIVEN AS EXAMPLES. TOOLS ARE NOT PROVIDED OR IMPOSED BY SCAME.